

Indoor units

ALL-OUTSIDE AIR DUCTED



■ 4 power sizes



(9.00-28.00 kW)

- Maximum compactness: only 28 cm (9.00-14.00 kW) and only 37.9 cm (22.40-28.00 kW)
- Max pressure head of fans: 200 Pa
- Automatic function "all-outside air" to save energy when the outdoor temperature drops below the set temperature.
- Can be connected to 8-60HP outdoor units except Micro Compact KXZ (4-6HP) and KXZ Smart

FDU 650~2400 FKXZE1

AIR CONDITIONING AND OUTDOOR AIR INTAKE

The diagram below illustrates the integration of the FDU-F unit inside a KXZ system.

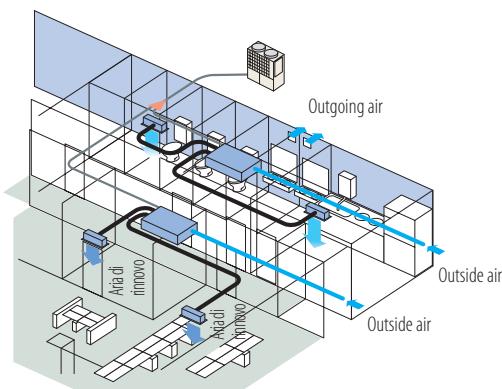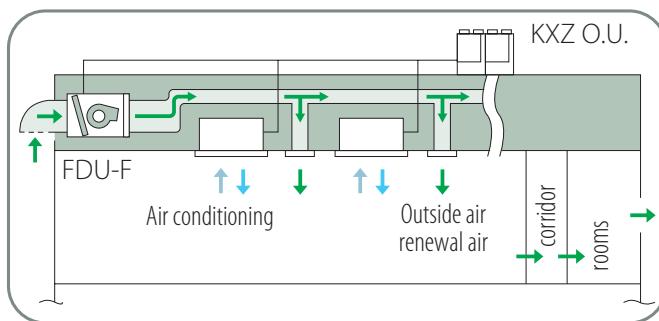

Note: Check the possible connections and limits of use on the technical documentation.

The compact design, the fan head of 200 Pa and the lowest noise level on the market make the unit suitable for installation in environments designed to ensure comfort and relaxation.

Model	FDU 650FKXZE1	FDU1100 FKXZE1	FDU 1800FKXZE1	FDU 2400FKXZE1
Nominal Cool. capacity kW	9.00	14.00	22.40	28.00
Nominal Heat. capacity kW	6.50	10.50	16.00	21.50
Power		220-240V~50Hz		
Cool. power consumption kW	0.24 - 0.25	0.35 - 0.36	1.16 - 1.20	1.16 - 1.20
Heat. power consumption kW	0.24 - 0.25	0.35 - 0.36	1.16 - 1.20	1.16 - 1.20
Rated current in Cool. A	1.80 - 1.70	2.30 - 2.20	6.80 - 6.50	6.80 - 6.50
Rated current in Heat. A	1.80 - 1.70	2.30 - 2.20	6.80 - 6.50	6.80 - 6.50
Sound power level dB(A)	55	62	68	70
Sound pressure level dB(A)	Hi 31	Hi 37	Hi 42	Hi 45
External dimensions (HxLxD) mm	280x950x635	280x1370x740	379x1600x893	379x1600x893
Net weight kg	34	54	89	89
Refrigerant circuit/Heat exchanger	Pipes finned and grooved internally			
Refrigerant control	Electronic expansion valve			
Air treatment/fan type and quantity	Centrifugal fan x 2		Centrifugal fan x 3	
Motor W	130	100 + 200	130 + 350	130 + 350
Starting method		Direct, in line		
Air flow (standard) m³/h	Hi 660	Hi 1080	Hi 1800	Hi 2400
Static pressure Pa	Max: 200	Max: 200	Max: 200	Max: 200
Air filter and quantity	To be found locally			
Shock and vibration absorption	Rubber vibration absorber (for fan motor)			
Thermal and acoustic insulation	Polyurethane foam			
Control devices	Optional wired remote control RC-E5, optional RCH-E3, optional RCN-KIT4-E2, optional RC-EX3A, optional RC-EX3A			
Ambient temperature control	Remote control kit: RCN-KIT4-E2			
Safety devices	Electronic thermostat			
Diameter refrigerant pipes mm (inch)	Gas side ø15.88 (5/8") Liquid side ø9.52 (3/8")			
Joining method	by flare fittings by brazing			
Refrigerant	R410A			
Drain pump	Built-in			
Condensate drain	Connectable with VP25			
Piping insulation	Necessary (on both sides, liquid and gas)			
Accessories included	Condensate drain pipe INWFIMHI001R00			
Wi-Fi module				