

MOVE THE WORLD FORWARD  MITSUBISHI
HEAVY
INDUSTRIES
GROUP

RESIDENTIAL RANGE

Monosplit & Multisplit



 **MITSUBISHI
HEAVY INDUSTRIES**

www.mitsubishi-termal.it



RESIDENTIAL RANGE

Monosplit & Multisplit

COMFORT AS A WELFARE STATE

HIGHLY SILENT

Concentrate, rest or sleep deeply. You can do this without the background noise. Forget the annoying hum. The use of DC Inverter fans makes MHI systems so silent as to be almost imperceptible.

ONLY 19 dB(A) KIREIA plus and KIREIA models (2.00, 2.50 and 3.50 kW).

HUMAN SENSOR CONTROL



COOLING OPERATION decreases the cooling intensity and raises the set-point temperature when it detects low activity inside the room.

KIREIA plus hybrid is equipped with a human sensor that feels the intensity of movement inside the room. The sensor is able to detect an individual's activity and its energy in order to deliver the most comfortable climate, reducing energy consumption.

HEATING OPERATION decreases the set-point temperature when it detects intense activity inside the room.



KIREIA Plus Hybrid is the winner of the "Silver A'Design Award" 2017 in *Engineering and Technical Design* category.



CONTROL YOUR AIR CONDITIONER BY AN APP!

ARE YOU OUT?

MH-WiFi is Termal's App that allows you to switch on and off, to adjust the room temperature and the air flow, and to set all the main functions of the air conditioner, by a few "touches" on your mobile device. With MH-WiFi, you can control your airconditioning system wherever you are, just by a simple Internet connection.

MH-WiFi is available for iOS device.

HEALTH PASSES THROUGH AIR QUALITY

THE SELF-CLEANING ALLERGEN CLEAR FILTER neutralizes pollen, dust mites, bacteria, viruses and other allergens from the air.

THE PHOTOCATALYTIC FILTER keeps the air clean and pleasant thanks to its double filtering and deodorizing action.

THE "SELF CLEAN" FUNCTION is the special automatic sanitization process that blocks the formation and proliferation of mold and unpleasant odors.

THE ANTIBACTERIAL TREATMENT OF FAN eliminates bacteria and mold - even those that may rise when the air conditioner has not operated for a long time -, making the system clean and safe.

THE STERILIZING NATURAL ENZYME FILTER acts so that the enzymes attack the microorganisms present in the air, responsible of many diseases transmitted through the air, trapping them in the filter and eliminating them.




	SRK-ZSX	SRK-ZS	SRK-ZMX	SRK-ZR	SRK-ZMP	SRF-ZMX	SRR-ZM	SKM-ZSP
Anti-allergenic filter	1 pc.	1 pc.	1 pc.	1 pc.	-	1 pc.	-	-
Photocatalytic filter	1 pc.	1 pc.	1 pc.	1 pc.	-	1 pc.	-	-
Allergen Clear function	YES	YES	YES	YES	-	-	-	-
Self Clean Operation	YES	YES	YES	YES	YES	YES	YES	YES
	SRK-ZSX	SRK-ZS	SRK-ZMX	SRK-ZR	SRK-ZMP	SRF-ZMX	SRR-ZM	SKM-ZSP
3D VENTILATION	YES	YES	YES	YES	-	YES	-	-
3D AUTO VENTILATION	YES	YES	YES	YES	-	YES	-	-

RESIDENTIAL RANGE

Monosplit KIREIA Plus Hybrid



Wall



SRK 20-60 ZSX-(S/WT)

titanium

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (Hi-Mi-Lo-Ulo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
SRK 20 ZSX-(S/WT)/SRC 20 ZSX-S	2.00 (0.90~3.20) - 2.70 (0.80~5.30)	0.32 (0.16~0.74) - 0.47 (0.14~1.36)	6.25 / 5.74	9.50 - A+++ / 5.20 - A+++	6.35 (1/4") - 9.52 (3/8")	38-31-34-19 / 44	53 / 58	305x920x220 / 13	640x800(+71)x290 / 43
SRK 25 ZSX-(S/WT)/SRC 25 ZSX-S	2.50 (0.90~3.70) - 3.20 (0.80~5.80)	0.44 (0.16~0.89) - 0.59 (0.14~1.54)	5.68 / 5.42	9.60 - A+++ / 5.20 - A+++	6.35 (1/4") - 9.52 (3/8")	39-33-25-19 / 45	55 / 58	305x920x220 / 13	640x800(+71)x290 / 43
SRK 35 ZSX-(S/WT)/SRC 35 ZSX-S	3.50 (0.90~4.30) - 4.30 (0.80~6.60)	0.78 (0.16~1.26) - 0.90 (0.14~1.89)	4.49 / 4.78	9.20 - A+++ / 5.10 - A+++	6.35 (1/4") - 9.52 (3/8")	43-35-26-19 / 48	58 / 62	305x920x220 / 13	640x800(+71)x290 / 43
SRK 50 ZSX-(S/WT)/SRC 50 ZSX-S	5.00 (1.00~5.80) - 6.00 (0.60~8.10)	1.30 (0.19~1.80) - 1.36 (0.18~2.43)	3.85 / 4.41	8.20 - A++ / 4.70 - A++	6.35 (1/4") - 12.7 (1/2")	44-39-31-22 / 50	59 / 63	305x920x220 / 13	640x800(+71)x290 / 45
SRK 60 ZSX-(S/WT)/SRC 60 ZSX-S	6.10 (1.00~6.80) - 6.80 (0.60~8.70)	1.81 (0.19~2.50) - 1.67 (0.18~2.86)	3.37 / 4.07	7.60 - A+ / 4.70 - A+	6.35 (1/4") - 12.7 (1/2")	46-41-33-22 / 52	62 / 65	305x920x220 / 13	640x800(+71)x290 / 45

KIREIA Hybrid

Wall




SRK 20-50 ZS-S(T)

titanium

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (Hi-Mi-Lo-Ulo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
SRK 20 ZS-S(T)/SRC 20 ZS-S	2.00 (1.00~2.80) - 2.70 (0.90~4.20)	0.44 (0.21~0.77) - 0.62 (0.17~1.38)	4.55 / 4.35	7.80 - A++ / 4.60 - A++	6.35 (1/4") - 9.52 (3/8")	34-25-22-19 / 45	50 / 57	290x870x230 / 9.5	540x780(+62)x290 / 31.5
SRK 25 ZS-S(T)/SRC 25 ZS-S	2.50 (1.00~3.00) - 3.20 (0.90~4.40)	0.62 (0.21~0.88) - 0.80 (0.17~1.36)	4.03 / 4.00	7.80 - A++ / 4.60 - A++	6.35 (1/4") - 9.52 (3/8")	36-28-23-19 / 46	52 / 58	290x870x230 / 9.5	540x780(+62)x290 / 31.5
SRK 35 ZS-S(T)/SRC 35 ZS-S	3.50 (1.00~3.80) - 4.00 (0.90~4.80)	1.01 (0.21~1.24) - 1.00 (0.17~1.45)	3.47 / 4.00	7.80 - A++ / 4.60 - A++	6.35 (1/4") - 9.52 (3/8")	40-30-26-19 / 50	56 / 62	290x870x230 / 9.5	540x780(+62)x290 / 34.5
SRK 50 ZS-S(T)/SRC 50 ZS-S	5.00 (1.70~5.50) - 5.80 (1.60~6.60)	1.56 (0.40~2.30) - 1.59 (0.37~2.30)	3.21 / 3.65	6.26 - A+ / 4.20 - A+	6.35 (1/4") - 12.7 (1/2")	45-36-28-22 / 53	58 / 63	290x870x230 / 10	595x780(+62)x290 / 36.5

HEALTH

Wall

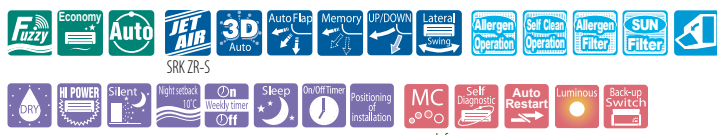

SRK 25-35 ZMX-S

SRK 63-80 ZR-S

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (Hi-Mi-Lo-Ulo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
SRK/SRC 25 ZMX-S	2.55 (0.90~3.20) - 3.13 (0.90~4.70)	0.49 (0.19~0.82) - 0.595 (0.23~1.12)	5.20 / 5.26	7.60 - A++ / 4.26 - A+	6.35 (1/4") - 9.52 (3/8")	41-31-25-22 / 47	55 / 60	309x890x220 / 13.5	595x780(+62)x290 / 35
SRK/SRC 35 ZMX-S	3.50 (0.90~4.10) - 4.30 (0.90~5.10)	0.845 (0.19~1.01) - 0.96 (0.23~1.35)	4.14 / 4.48	7.20 - A++ / 4.27 - A+	6.35 (1/4") - 9.52 (3/8")	43-33-25-22 / 50	58 / 63	309x890x220 / 13.5	595x780(+62)x290 / 35
SRK/SRC 63 ZR-S	6.30 (1.20~7.10) - 7.10 (0.80~9.00)	1.85 (0.54~2.50) - 1.74 (0.37~2.80)	3.41 / 4.08	7.60 - A++ / 4.70 - A++	6.35 (1/4") - 12.7 (1/2")	44-39-35-25 / 54	58 / 67	339x1197x262 / 15.5	640x800(+71)x290 / 45
SRK/SRC 71 ZR-S	7.10 (2.30~7.70) - 8.00 (2.00~10.00)	2.05 (0.54~2.70) - 2.06 (0.37~3.40)	3.46 / 3.88	7.20 - A++ / 4.50 - A+	6.35 (1/4") - 15.88 (5/8")	44-41-37-25 / 53	60 / 65	339x1197x262 / 15.5	750x880(+88)x340 / 57
SRK/SRC 80 ZR-S	8.00 (2.30~9.00) - 9.00 (2.10~10.50)	2.35 (0.54~3.20) - 2.40 (0.37~3.50)	3.40 / 3.75	6.60 - A++ / 4.40 - A+	6.35 (1/4") - 15.88 (5/8")	47-44-39-26 / 56	62 / 68	339x1197x262 / 16.5	750x880(+88)x340 / 58.5

SMART

Wall



SRK 25-45 ZMP-S

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (Hi-Mi-Lo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
SRK/SRC 25 ZMP-S	2.50 (0.90~2.80) - 2.80 (0.80~3.90)	0.78 (0.25~1.01) - 0.75 (0.20~1.43)	3.21 / 3.71	5.50 - A / 3.82 - A	6.35 (1/4") - 9.52 (3/8")	45-34-23 / 47	59 / 60	262x769x210 / 6.9	540x645(+57)x275 / 25
SRK/SRC 35 ZMP-S	3.20 (0.90~3.50) - 3.60 (0.90~4.30)	0.995 (0.23~1.32) - 0.995 (0.19~1.31)	3.22 / 3.62	6.15 - A++ / 4.00 - A+	6.35 (1/4") - 9.52 (3/8")	47-36-23 / 49	60 / 60	262x769x210 / 7.2	540x645(+57)x275 / 27
SRK/SRC 45 ZMP-S	4.50 (0.90~4.80) - 5.00 (0.80~5.80)	1.495 (0.22~1.98) - 1.385 (0.20~1.86)	3.01 / 3.61	5.38 - A / 3.81 - A	6.35 (1/4") - 12.7 (1/2")	46-40-25 / 52	60 / 65	262x769x210 / 7.6	595x780(+62)x290 / 40

1. Value measured according to harmonized rule EN14511. 2. Commission Delegated Regulation EU N.206/2012. Value measured according to harmonized rule EN14825.

RESIDENTIAL RANGE

Monosplit PRIMARY HEATING



Console



SRF 25~50 ZMX-S

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (Hi-Mi-Lo-Ulo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
SRF/SRC 25 ZMX-S	2.50 (0.90~3.20) - 3.40 (0.90~4.70)	0.521 (0.19~0.82) - 0.723 (0.23~1.20)	4.80 / 4.70	6.90 - A++ / 4.12 - A+	6.35 (1/4") - 9.52 (3/8")	40-32-29-26 / 47	51 / 60	600x860x238 / 18	590x780(+62)x290 / 35
SRF/SRC 35 ZMX-S	3.50 (0.90~4.10) - 4.50 (0.90~5.10)	0.890 (0.19~1.26) - 1.124 (0.23~1.43)	3.93 / 4.00	6.67 - A++ / 4.25 - A+	6.35 (1/4") - 9.52 (3/8")	41-34-32-28 / 50	52 / 63	600x860x238 / 19	590x780(+62)x290 / 35
SRF 50 ZMX-S/SRC 50 ZSX-S	5.00 (1.10~5.20) - 6.00 (0.60~6.90)	1.390 (0.20~1.70) - 1.540 (0.20~2.15)	3.60 / 3.90	6.01 - A+ / 4.19 - A+	6.35 (1/4") - 12.7 (1/2")	46-42-35-32 / 54	58 / 63	600x860x238 / 19	640x800(+71)x290 / 45

LIGHT COMMERCIAL

Ducted low static pressure



SRR 25~35 ZM-S

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (Hi-Mi-Lo-Ulo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
SRR 25 ZM-S/SRC 25 ZMX-S	2.50 (1.00~3.30) - 3.40 (1.40~4.80)	0.57 (0.21~0.86) - 0.75 (0.26~1.32)	4.39 / 4.53	6.43 - A++ / 4.08 - A+	6.35 (1/4") - 9.52 (3/8")	37-33-30-24 / 47	59 / 60	200x750x500 / 20.5	595x780(+62)x290 / 35
SRR 35 ZM-S/SRC 35 ZMX-S	3.50 (1.00~3.90) - 4.20 (1.50~5.20)	0.98 (0.21~1.20) - 1.03 (0.26~1.47)	3.57 / 4.08	6.33 - A++ / 4.02 - A+	6.35 (1/4") - 9.52 (3/8")	38-34-31-25 / 50	60 / 62	200x750x500 / 20.5	595x780(+62)x290 / 35

Ducted medium static pressure



FDUM 40~50VF

FDUM 60VF

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (P-Hi-Hi-Mi-Lo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
FDUM 40VF/SRC 40 ZSX-S	4.00 (1.10~4.70) - 4.50 (0.60~5.40)	0.952 - 1.07	4.20 / 4.21	6.01 - A+ / 4.15 - A+	6.35 (1/4") - 12.7 (1/2")	37-32-29-26 / 50	60 / 63	280x750x635 / 29	640x800(+71)x290 / 45
FDUM 50VF/SRC 50 ZSX-S	5.00 (1.10~5.60) - 5.40 (0.60~6.30)	1.38 - 1.45	3.62 / 3.72	5.68 - A+ / 4.36 - A+	6.35 (1/4") - 12.7 (1/2")	37-32-29-26 / 54	60 / 63	280x750x635 / 29	640x800(+71)x290 / 45
FDUM 60VF/SRC 60 ZSX-S	5.60 (1.10~6.30) - 6.70 (0.60~7.10)	1.54 - 1.75	3.64 / 3.83	6.42 - A++ / 4.37 - A+	6.35 (1/4") - 12.7 (1/2")	36-31-28-25 / 54	60 / 65	280x950x635 / 34	640x800(+71)x290 / 45

Ceiling



RCN-E-E2
Optional kit



FDE 40~60VG

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (P-Hi-Hi-Mi-Lo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
FDE 40VG/SRC 40 ZSX-S	4.00 (1.10~4.70) - 4.50 (0.60~5.40)	1.02 - 1.10	3.92 / 4.09	6.46 - A++ / 3.93 - A	6.35 (1/4") - 12.7 (1/2")	46-38-36-31 / 50	60 / 63	210x1070x690 / 28	640x800(+71)x290 / 45
FDE 50VG/SRC 50 ZSX-S	5.00 (1.10~5.60) - 5.40 (0.60~6.30)	1.52 - 1.46	3.29 / 3.70	6.10 - A++ / 3.92 - A	6.35 (1/4") - 12.7 (1/2")	46-38-36-31 / 54	60 / 63	210x1070x690 / 28	640x800(+71)x290 / 45
FDE 60VG/SRC 60 ZSX-S	5.60 (1.10~6.30) - 6.70 (0.60~7.10)	1.75 - 1.86	3.20 / 3.60	6.72 - A++ / 4.08 - A+	6.35 (1/4") - 12.7 (1/2")	47-41-37-32 / 54	60 / 65	210x1320x690 / 33	640x800(+71)x290 / 45

Cassette 60x60



FDTC 25~60VF



Standard panel
TC-PSA-25W-E

Indoor units Outdoor units	Capacity cool-heat. (kW)	Power Input cool-heat. (kW)	EER/COP1 Energy Class	SEER/SCOP2 Energy Efficiency Class Seasonal	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m I.U./O.U. [dB(A)] (Hi-Mi-Lo)	Sound power level I.U./O.U. dB(A)	Dimensions mm (HxWxD)/ Net weight (kg) I.U.	Dimensions mm (HxWxD)/ Net weight (kg) O.U.
FDTC 25VF/SRC 25 ZMX-S	2.55 (0.90~3.20) - 3.45 (0.90~4.70)	0.60 - 0.84	4.25 / 4.11	6.10 - A++ / 4.13 - A+	6.35 (1/4") - 9.52 (3/8")	36-32-29 / 47	50 / 60	248x570x570 / 15	590x780(+62)x290 / 38
FDTC 35VF/SRC 35 ZMX-S	3.60 (0.90~4.10) - 4.25 (0.90~5.10)	1.07 - 1.16	3.36 / 3.66	6.12 - A++ / 4.15 - A+	6.35 (1/4") - 9.52 (3/8")	40-36-30 / 50	54 / 62	248x570x570 / 15	590x780(+62)x290 / 38
FDTC 40VF/SRC 40 ZSX-S	4.00 (1.10~4.70) - 4.50 (0.60~5.40)	1.04 - 1.10	3.85 / 4.09	6.53 - A++ / 3.96 - A	6.35 (1/4") - 12.7 (1/2")	42-36-30 / 49	60 / 63	248x570x570 / 15	640x800(+71)x290 / 45
FDTC 50VF/SRC 50 ZSX-S	5.00 (1.10~5.60) - 5.40 (0.60~6.30)	1.56 - 1.45	3.21 / 3.72	6.01 - A+ / 3.85 - A	6.35 (1/4") - 12.7 (1/2")	42-36-30 / 50	60 / 63	248x570x570 / 15	640x800(+71)x290 / 45
FDTC 60VF/SRC 60 ZSX-S	5.60 (1.10~6.30) - 6.70 (0.60~7.10)	1.99 - 2.07	2.81 / 3.24	5.76 - A+ / 3.80 - A	6.35 (1/4") - 12.7 (1/2")	46-39-30 / 52	60 / 65	248x570x570 / 15	640x800(+71)x290 / 45

RESIDENTIAL RANGE

Multisplit



Indoor units



KIREIA Plus
Hybrid

SRK ZSX-(S/WT) Wall

Indoor units	Capacity cool.-heat. (kW)	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m [dB(A)] (Hi-Mi-Lo-U.Lo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
SRK 20 ZSX-(S/WT)	2.00 - 3.00	6.35 (1/4") - 9.52 (3/8")	38 - 31 - 24 - 19	53	305x920x220 / 13
SRK 25 ZSX-(S/WT)	2.50 - 3.40	6.35 (1/4") - 9.52 (3/8")	39 - 33 - 25 - 19	55	305x920x220 / 13
SRK 35 ZSX-(S/WT)	3.50 - 4.50	6.35 (1/4") - 9.52 (3/8")	43 - 35 - 26 - 19	58	305x920x220 / 13
SRK 50 ZSX-(S/WT)	5.00 - 5.80	6.35 (1/4") - 12.7 (1/2")	44 - 39 - 31 - 22	59	305x920x220 / 13
SRK 60 ZSX-(S/WT)	6.00 - 6.80	6.35 (1/4") - 12.7 (1/2")	46 - 41 - 33 - 22	62	305x920x220 / 13



KIREIA
Hybrid

SRK ZS-S(T) Wall

Indoor units	Capacity cool.-heat. (kW)	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m [dB(A)] (Hi-Mi-Lo-U.Lo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
SRK 20 ZS-S(T)	2.00 - 3.00	6.35 (1/4") - 9.52 (3/8")	34 - 25 - 22 - 19	50	290x870x230 / 9,5
SRK 25 ZS-S(T)	2.50 - 3.40	6.35 (1/4") - 9.52 (3/8")	36 - 28 - 23 - 19	52	290x870x230 / 9,5
SRK 35 ZS-S(T)	3.50 - 4.50	6.35 (1/4") - 9.52 (3/8")	40 - 30 - 26 - 19	56	290x870x230 / 9,5
SRK 50 ZS-S(T)	5.00 - 5.80	6.35 (1/4") - 12.7 (1/2")	45 - 36 - 28 - 22	58	290x870x230 / 10



SRK ZMX-S SRK ZR-S Wall

Indoor units	Capacity cool.-heat. (kW)	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m [dB(A)] (Hi-Mi-Lo-U.Lo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
SRK 20 ZMX-S	2.00 - 3.00	6.35 (1/4") - 9.52 (3/8")	39 - 30 - 24 - 21	53	309x890x220 / 13,5
SRK 25 ZMX-S	2.50 - 3.40	6.35 (1/4") - 9.52 (3/8")	41 - 31 - 25 - 22	55	309x890x220 / 13,5
SRK 35 ZMX-S	3.50 - 4.50	6.35 (1/4") - 9.52 (3/8")	43 - 33 - 25 - 22	58	309x890x220 / 13,5
SRK 71 ZR-S	7.10 - 8.00	6.35 (1/4") - 15.88 (5/8")	44 - 41 - 37 - 25	58	339x1197x262 / 15,5

SKM ZSP-S* Wall

Indoor units	Capacity cool.-heat. (kW)	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m [dB(A)] (Hi-Mi-Lo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
SKM 20 ZSP-S	2.00 - 3.00	6.35 (1/4") - 9.52 (3/8")	42 - 35 - 24	58	262x769x210 / 7,6
SKM 25 ZSP-S	2.50 - 3.40	6.35 (1/4") - 9.52 (3/8")	43 - 35 - 24	58	262x769x210 / 7,6
SKM 35 ZSP-S	3.50 - 4.50	6.35 (1/4") - 9.52 (3/8")	44 - 37 - 24	59	262x769x210 / 7,6

* This I.U. must only be used with:
SCM 40 ZS-S
SCM 45 ZS-S
SCM 50 ZS-S



MITSUBISHI HEAVY INDUSTRIES

Indoor units



SRF ZMX-S Console

Indoor units	Capacity cool.-heat. (kW)	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m [dB(A)] (Hi-Mi-Lo-Ulo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
SRF 25 ZMX-S	2.50 - 3.40	6.35 (1/4") - 9.52 (3/8")	40 - 32 - 29 - 26	51	600x860x238 / 18
SRF 35 ZMX-S	3.50 - 4.50	6.35 (1/4") - 9.52 (3/8")	41 - 34 - 33 - 28	52	600x860x238 / 19
SRF 50 ZMX-S	5.00 - 5.80	6.35 (1/4") - 12.7 (1/2")	46 - 42 - 35 - 32	58	600x860x238 / 19



SRR ZM-S Ducted low static pressure

Indoor units	Capacity cool.-heat. (kW)	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m [dB(A)] (Hi-Mi-Lo-Ulo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
SRR 25 ZM-S	2.50 - 3.40	6.35 (1/4") - 9.52 (3/8")	37 - 33 - 30 - 24	56	200x750x500 / 20.5
SRR 35 ZM-S	3.50 - 4.50	6.35 (1/4") - 9.52 (3/8")	38 - 34 - 31 - 25	57	200x750x500 / 20.5
SRR 50 ZM-S	5.00 - 5.80	6.35 (1/4") - 12.7 (1/2")	41 - 37 - 34 - 29	59	200x950x500 / 24
SRR 60 ZM-S	6.00 - 6.80	6.35 (1/4") - 12.7 (1/2")	44 - 38 - 35 - 30	60	200x950x500 / 24



FDUM VF Ducted medium static pressure

Indoor units	Capacity cool.-heat. (kW)	Diametro tubazioni frigorifere lato liq./gas. mm (inch.)	Sound pressure level at 1 m [dB(A)] (Uhi-Hi-Mi-Lo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
FDUM 50 VF	5.00 - 5.80	6.35 (1/4") - 12.7 (1/2")	37 - 32 - 29 - 26	60	280x750x635 / 29



FDE VG Ceiling

Indoor units	Capacity cool.-heat. (kW)	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m [dB(A)] (Uhi-Hi-Mi-Lo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
FDE 50 VG	5.00 - 5.40	6.35 (1/4") - 12.7 (1/2")	46 - 39 - 36 - 31	60	210x1070x690 / 28



FDTC VF Cassette 60x60

Indoor units	Capacity cool.-heat. (kW)	Refrigerant Pipe Liquid/Gas side mm (inch.)	Sound pressure level at 1 m [dB(A)] (Uhi-Hi-Mi-Lo)	Max. sound power level [dB(A)]	Dimensions mm (HxWxD) Net weight (kg)
FDTC 25 VF	2.50 - 3.40	6.35 (1/4") - 9.52 (3/8")	38 - 36 - 32 - 29	56	248x570x570 / 15
FDTC 35 VF	3.50 - 4.50	6.35 (1/4") - 9.52 (3/8")	41 - 40 - 36 - 30	58	248x570x570 / 15
FDTC 50 VF	5.00 - 5.80	6.35 (1/4") - 12.7 (1/2")	47 - 42 - 36 - 30	60	248x570x570 / 15
FDTC 60 VF	6.00 - 6.80	6.35 (1/4") - 12.7 (1/2")	47 - 46 - 39 - 30	60	248x570x570 / 15



MOVE THE WORLD FORWARD

**MITSUBISHI
HEAVY
INDUSTRIES
GROUP**



TERMAL s.r.l.

Via della Salute, 14 - 40132 Bologna - Italy

T. +39 051 41 33 111 | F. +39 051 41 33 112 | info@termal.it | www.termal.it | www.mitsubishi-termal.it