

# INDIVIDUAL CONTROLS

## Optional controls

### TOUCH SCREEN CONTROL RC-EXZ3A ZONE CONTROL for ducted models FDUM and FDU

- Touch screen wired remote control with LCD display.
- Large size: 3.8" with backlighting.  
Simple 3-button interface. All settings can be made via the touch screen panel.
- Possibility of selecting up to 9 languages.
- Main functions the same as RC-EX3A control.



## ZONE CONTROL SYSTEM

Room temperatures can be controlled with a single ducted indoor unit.



## ZONE CONTROL FUNCTION


(FDUM 40~140 VH; FDU 71~280 VH)

This model has a zone control function and can control up to a maximum of 4 zones.

The zones consist of one common zone (\*1) and three split zones (\*2).

The dampers of each zone can be opened or closed via the RC-EXZ3A remote control.

A timer function for opening/closing the dampers is also available.

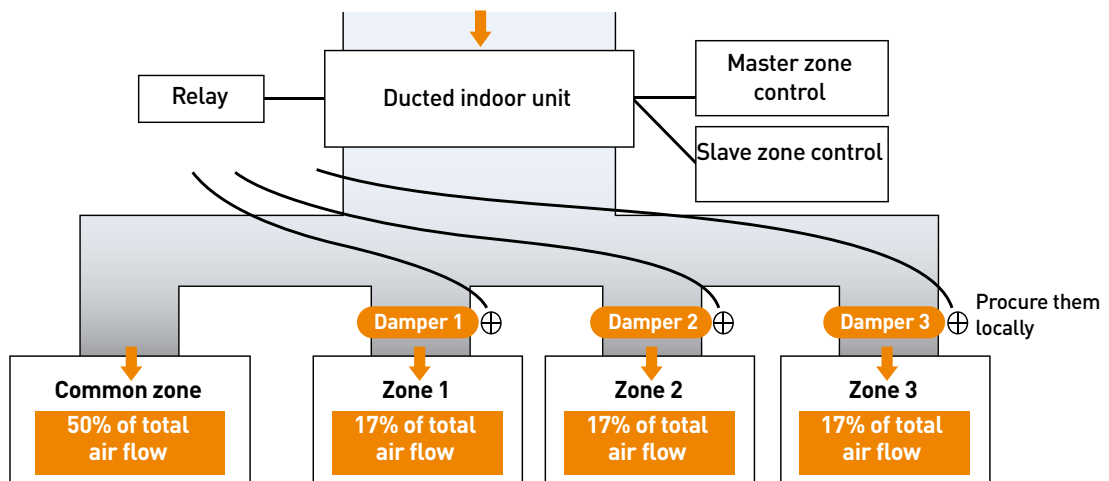

### Notes

\*1 Common zone: zone where the damper is not installed.

\*2 Split zone: zone where the damper is opened automatically.

It is not possible to control more than 4 zones.

Procure the relevant parts of the system (relays, dampers, ducts, wiring, dampers) locally.

Design the ductwork in such a way that the common zone and split zones individually do not exceed 50% of the total air flow.

Ducts in split zones must have the same static pressure.