

KXZR2

HEAT RECOVERY SYSTEM

The new KXZR2 features a tiered design and a completely new shape. Thanks to the 3-pipe system, a single outdoor unit can simultaneously heat or cool several indoor units.

SIMULTANEOUS HEATING AND COOLING

- Heat recovery.
- An extensive range of applications.
- Flexibility of the design.
- Improved cooling capacity at low temperature.
- Ease of maintenance.

NEW DESIGN AND ENHANCED COMPONENTS

- Rounded shape.
- Next-generation compressor that reduces friction between components.
- New Inverter control.
- High-efficiency heat pump.
- Optimised pipeline shape.



SYSTEM CHARACTERISTICS



These heat recovery systems work with 3 interconnecting pipes and therefore are commonly referred to as 3-pipe systems. These systems offer both heating and cooling in a single indoor unit, based on the room conditions/requirements. The systems incorporate a highly sophisticated air conditioning control for multiple indoor areas, regardless of the cooling or heating needs, for applications where the building orientation (N, S, E, W) may result in a heat increase/loss on different sides of the same building.

The range starts from a cooling capacity of 8 HP (22.4 kW), up to 24HP (67.0 kW).

The outdoor units can also be installed in "pairs" or in "triple combination", reaching 60HP/168.0 kW on a single system.

HEAT RECOVERY SYSTEMS

The interconnection piping system has a unique arrangement with two of the interconnecting pipes passing through a PFD distribution controller and the third tube connected directly to each indoor unit from the main pipe path. This reduces installation times and the number of braze-welded connections on the site. The PFD distribution controllers are available for single connection or as a 4-way combined PFD connection, with each connected unit characterised by independent cooling or heating.

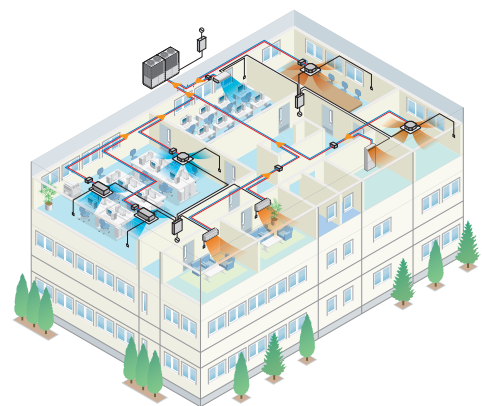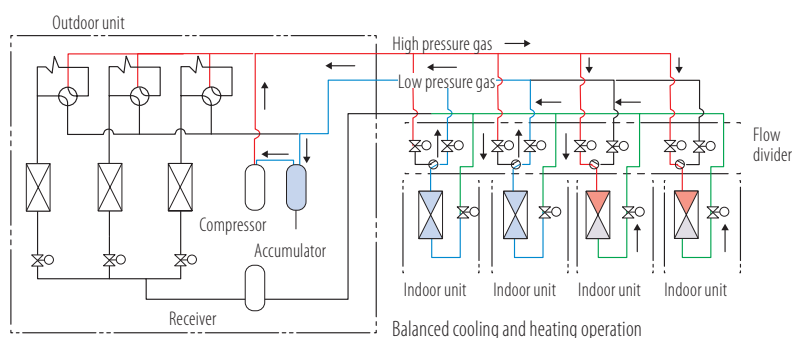

During defrost or during automatic compressor protection, activated every hour during heating, the heating operation stops and restarts temporarily after a specific time interval. The series is equipped with the same automatic compressor protection even in cooling mode.


During this protection period, only the air flow is active and

the cooling operation restarts at the end of a specific time interval.

This model is not suitable for the use of annual cooling operations, for example for the server room, especially in areas where the outdoor air temperature falls below 5° C.

WIDE OPERATING RANGE

The KXZR series has an extensible system design, considering a heating range at low temperature conditions down to -20° C, and a cooling range up to 46° C (previous model: 43° C).

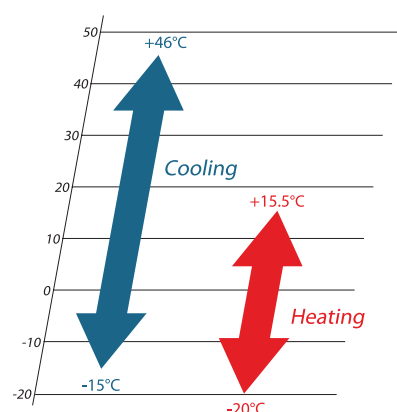

CONNECTABLE INDOOR UNITS

It is possible to connect up to 80 indoor units to the outdoor unit of greater power size. 14 different types of indoor units are available, visible or recessed, in different sizes, for a total of 81 overall possibilities.

DESIGN FLEXIBILITY

Total power of the indoor units

HP	KXZR
8~16	200%
17~34	160%
36~60	130%



- Where total power is higher than 130%, an additional refrigerant charge is required on site.
- With 8-34HP systems, if one or more of the FDK, FDFL, FDFU and/or FDFW series are connected to the system, the total power of the indoor units cannot exceed 130%.

SYSTEM CHARACTERISTICS

ENERGY EFFICIENCY IN HEAT RECOVERY MODE

High efficiency when cooling and heating occur simultaneously. System control maximises efficiency up to a maximum COP of 9.0* in both cooling and heating mode.

* Data obtained at 8HP in an outdoor temperature condition of 16°C DB/12°C WB, in a refrigerated room of 27°C DB/19°C WB, and in a heated room of 20°C DB/14.5°C WB.

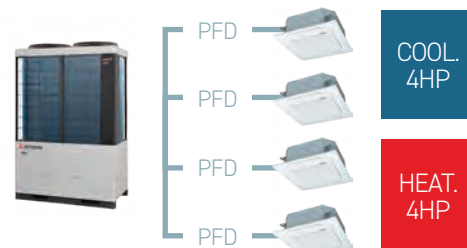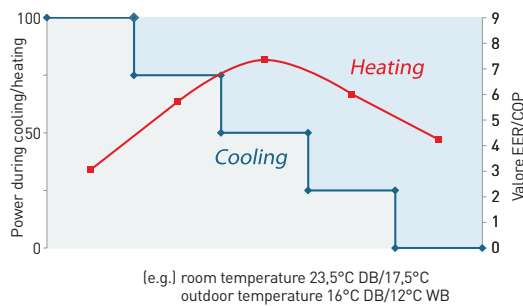

MAX COP > 9.0

Conditions:
FDC 224 KXZRE2
50% indoor units in cooling mode (27°C DB/19°C)
50% indoor units in heating mode (20°C DB/14.5°C)
Outdoor temperature 16°C DB/12°C WB

IMPROVED COOLING CAPACITY AT LOW OUTDOOR TEMPERATURE


The small partitions of the exchanger and the internal pressure control allow the outdoor unit to operate in cooling mode even in low outdoor temperature conditions, for greater capacity with very low temperatures (-5° C) compared to the previous model.

In the previous model, in the presence of a strong heating demands and simultaneous low cooling demands in low outdoor temperature conditions, the pressure control is adjusted to maintain a greater heating power compared to a sufficient cooling power.

The new heat exchanger and pressure control adopted in the KXZR series has improved operating efficiency in heating and cooling*.

* The cooling system has priority for the required heating mode compared to a very low cooling demand, where most of the indoor units are used in heating mode.

Delivery air temperature in the cooled room

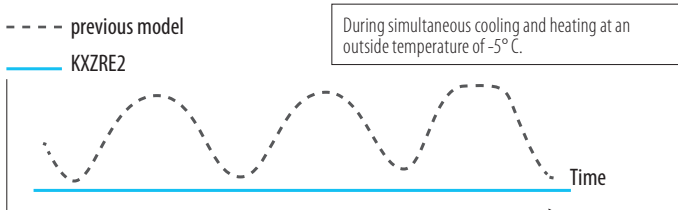

All connecting welds must be made under slight nitrogen pressure to prevent the oxidation of the inner surface of

If the longest distance (measured between the outdoor unit and the furthest indoor unit) is 90 m or more (actual length), change the size of the main pipe according to the following table. Even if the longest distance exceeds 90 m (actual length), it is not necessary to change the size of the exhaust gas pipes.


HP		8	10	12	14	16	17	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
Liquid side	Furthest	ø 9.52			ø 12.7						ø 15.88						ø 19.05												
Intake gas	I.U.	ø 19.05		ø 22.22		ø 28.58						ø 34.92																	
Delivery gas	=<90 m	ø 15.88		ø 19.05		ø 22.22						ø 28.58																	
Liquid side	Furthest	ø 12.7						ø 15.88						ø 19.05						ø 22.22									
Intake gas	I.U.	ø 22.22				ø 28.58						ø 34.92																	
Delivery gas	=>90 m	ø 15.88		ø 19.05		ø 22.22						ø 28.58																	

MANIFOLDS




DOS-2A-3-R1

SINGLE OUTDOOR UNIT

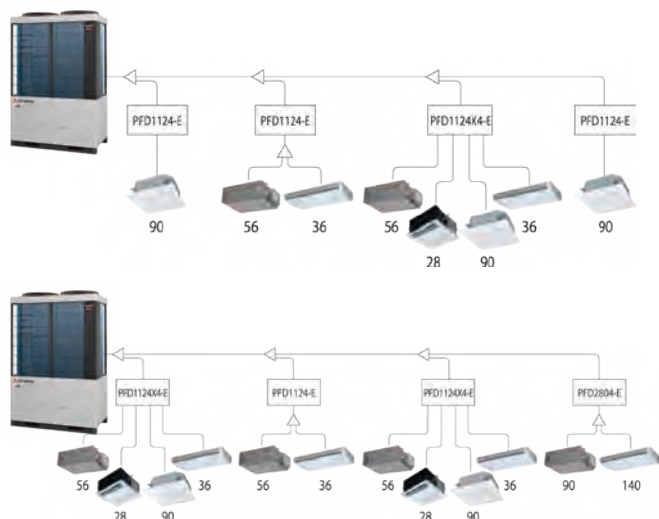


COMBINED OUTDOOR UNITS

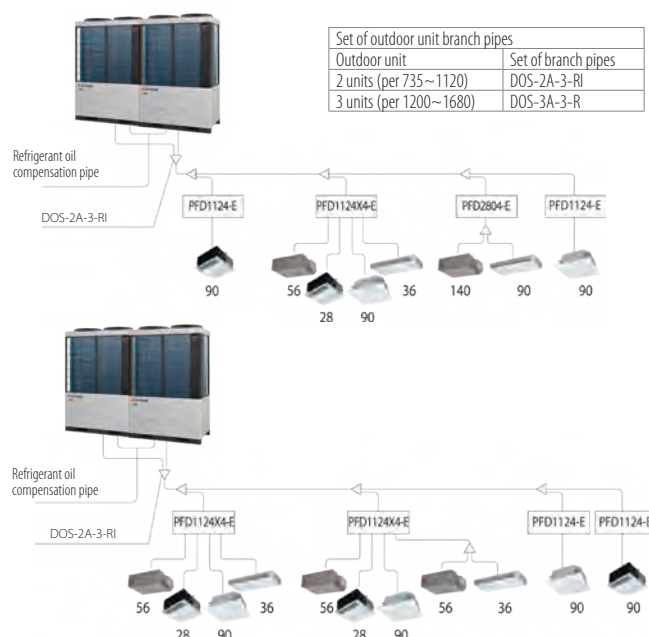

First branch pipe of the indoor unit		Downstream of the PFD	
Total capacity of indoor units	Set of branch pipes	Total capacity of indoor units	Set of branch pipes
~179	DIS-22-1-RI	~179	DIS-22-1B
180~370	DIS-180-1-RI	180~370	DIS-180-1B
371~539	DIS-371-2-RI	371~539	DIS-371-1B
540~	DIS-540-2-RI	540~	DIS-540-3B

ELECTRICAL CONNECTIONS

VRF MHI systems require highly simplified electrical connections to the indoor units, thanks to a control circuit that uses 2 non-polarised conductors. The outdoor unit can be accessed from all sides for electrical connections (front, rear, bottom, right and left). A separate single-phase or three-phase power supply must be brought in for outdoor and indoor units, depending on the product specification.

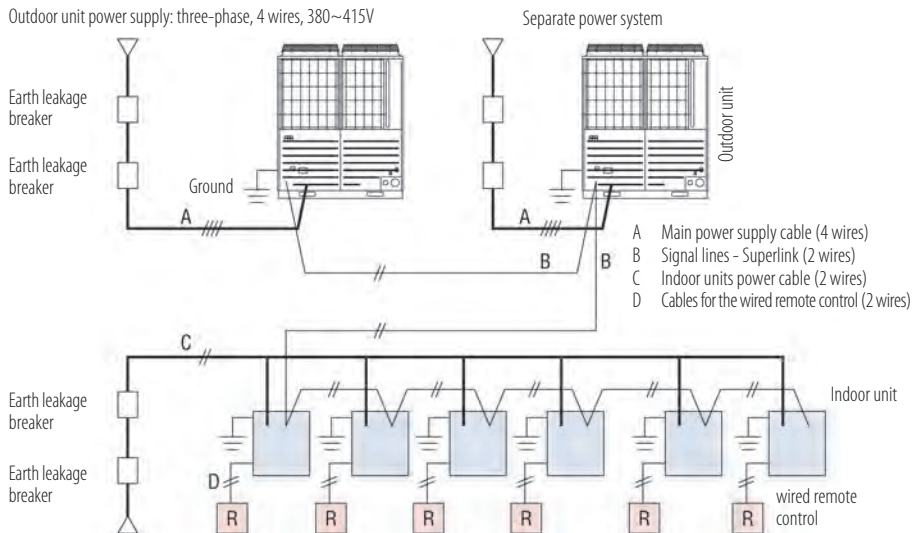

Indoor unit power supply: single-phase 220~240V

CAUTION: if the RCD is dedicated solely to protecting against leakage to earth, it will be necessary to install a circuit breaker.

CONNECTIONS

SIGNAL LINE


The signal line that connects the outdoor unit to the indoor units is 5 VDC and uses 2 non-polarised conductors marked A1 and B1. For the signal line with 2 conductors, use shielded cables measuring 0.75 or 1.50 mm². Earth the shield on all the indoor and outdoor units.

	0.75 mm ²	1.50 mm ²
~1000 mm	YES	YES
1000~1500 mm	YES	NO


If using combined outdoor units, connect:

- The signal line between indoor and outdoor units, and the signal line between outdoor units that belong to the same refrigerant line, to A1 and B1;
- The signal line between outdoor units belonging to a different refrigerant line to A2 and B2.


CAUTION: star connections on the signal lines are not permitted.



Single outdoor unit

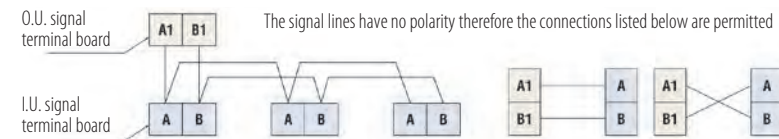

Combined outdoor units

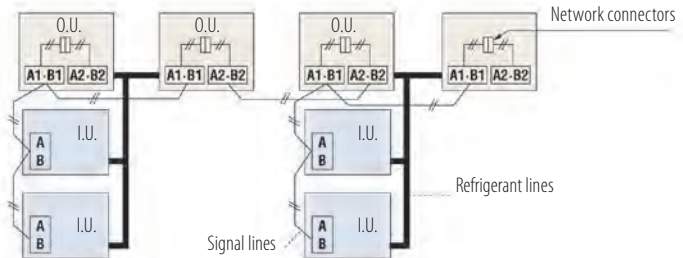


The maximum number of indoor units that can be connected to a signal line is 128, and it is possible to create groups of outdoor and/or indoor units connected to the same outdoor unit or to separate outdoor units, as long as they are connected to the same signal line. The signal line can also be connected by adopting the method described below (multiple connectors).

WIRED REMOTE CONTROL

The specifications for the connection between the wired remote control and the indoor units (XY connection) are 0.5 mm² x 2 wires. The maximum permitted length is 600 m. If the length exceeds 100 m, refer to the table.

Length (m)	Type of cables
100~200	0.5 mm ² x 2 wires
~300	0.75 mm ² x 2 wires
~400	1.50 mm ² x 2 wires
~600	2.0 mm ² x 2 wires

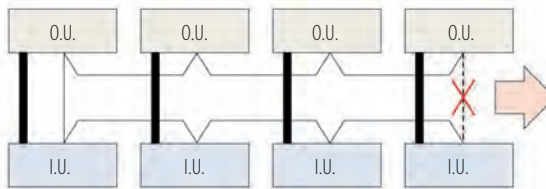

A loop cannot be formed with the signal, therefore the section of the connection indicated with is not permitted

Low noise flow divider

PFD 1124-E, PFD 1804-E, PFD 2804-E, PFD 1124X4-E

Designed and manufactured at Mitsubishi Heavy Industries specialist research laboratories, the PFD flow divider enables all indoor units to be integrated into an air conditioning network, to switch from cooling mode to heating mode, or vice versa, while the whole system remains operational, thus preventing unnecessary power on and power off cycles. By using the optional extension cable for the PFD box, equipped with a connector, it is possible to further separate the PFD box from the indoor unit. This enables a reduction in sound level caused by the PDF box and the flow of refrigerant.



4-outlet PFD



Relay kit


CONNECTIONS

PFD 1124-E, PFD 1804-E, PFD 2804-E,
PFD 1124X4-E

Selection and control from centralised panel

The remote control settings (such as power on/off of single indoor units, temperature setting, as well as controlling the heating/cooling procedures) are possible via an individual control connected to each indoor unit. At the same time, together with the individual controls, the SC-SL1N/2NA/4-AE3/BE3 centralised control panels can also be used.



For more details, refer to the Installation Manual.

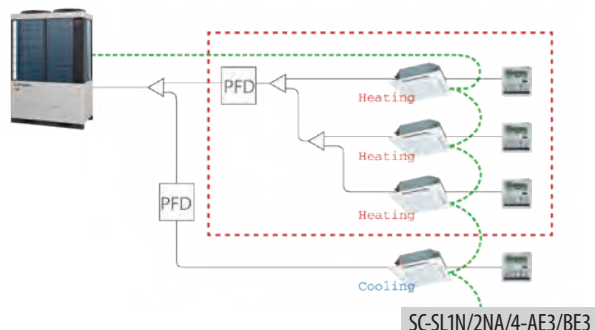


Ease of installation

The PFD flow divider requires only the connection of gas-side piping, including low-pressure piping from the O.U., while the liquid-side piping is connected directly to the I.U. This reduces the number of connections and, consequently, installation times and costs. Groups of indoor units up to a total capacity of 28 kW can be connected to a single PFD by means of branch pipes, all of which operate in the same mode, cooling or heating. Also available is a 4-connection distributor, PFD1124X4-E, which allows up to 4 groups of indoor units to be connected, operating individually in cooling or heating mode.

The PFD flow divider is connected to the indoor unit via a relay kit (supplied) to be installed within a maximum distance of 2 metres from the indoor unit. The maximum distance between the PFD and the I.U. is 40 metres. The power of the PFD comes directly from the indoor unit.

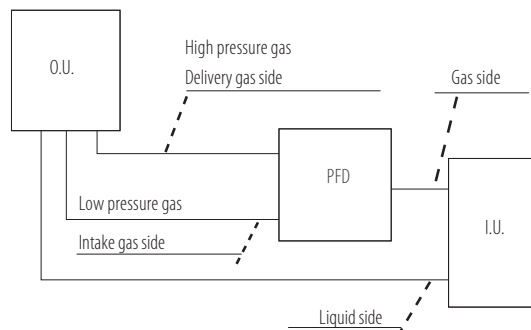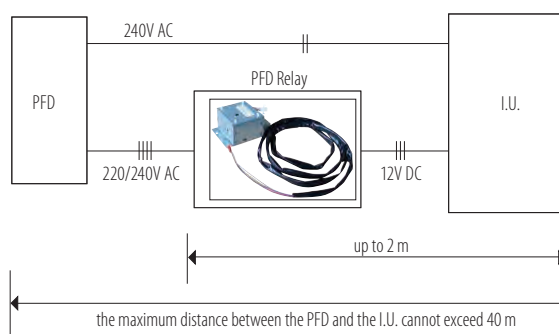

PFD4-15WR-W
15m Extension Cable for
PFD-Box KXZR (optional)

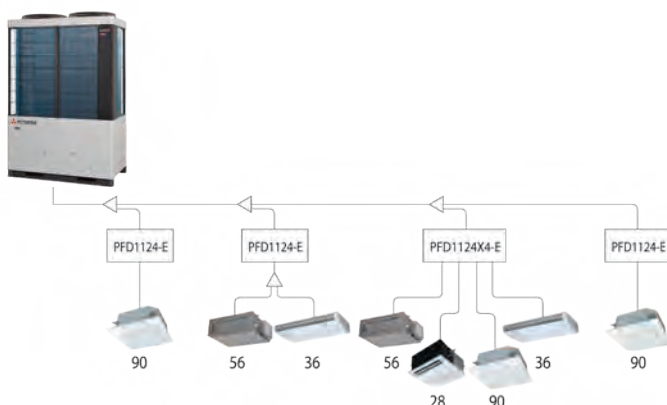

Flow divider	Total I.U. power downstream	Connectable indoor units*
PFD 1124-E	up to 11.2 kW	1-5
PFD 1804-E	up to 18.0 kW	1-8
PFD 2804-E	up to 28.0 kW	1-10
PFD 1124X4-E	up to 37.1 kW total (divided over the 4 connections)	up to 16

* Refer to the technical manuals for specifications.

KXZR2 heat recovery

KXZR2

CONNECT UP TO 44 INDOOR
UNITS/200% CAPACITY

FDC 224 KXZRE2 22.4 kW


FDC 280 KXZRE2 28.0 kW

FDC 335 KXZRE2 33.5 kW

8~12HP
(22.4~33.5 kW)




OPERATING RANGE



CHARACTERISTICS

- Maximum energy efficiency COP 4.25 e EER 3.89 [8 HP]
- Only DC Inverter compressors
- High split: up to 1000 m in total and with a maximum distance between the O.U. and the furthest I.U. of 160 m
- Up to 85 Pa prevalence on fans

INSTALLATION DIAGRAM

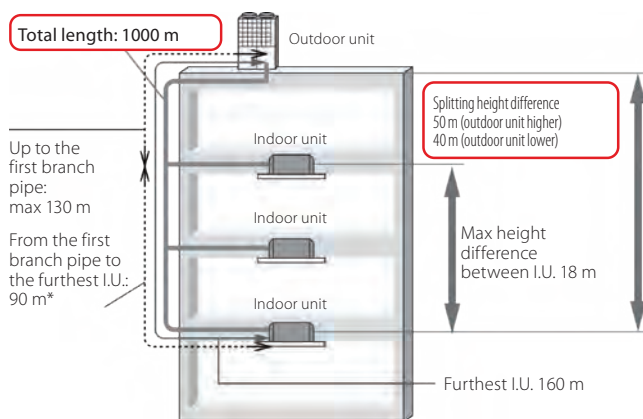

* With difference of length between the farthest indoor unit and the nearest one from the first branch pipe < 40 m.

Models			FDC224KXZRE2	FDC280KXZRE2	FDC335KXZRE2
Rated power		HP	8	10	12
Nominal capacity (T=35℃)	Cooling	kW	22.40	28.00	33.50
Power consumption (T=35℃)		kW	5.76	7.39	9.65
Seasonal energy efficiency index		SEER1	6.21	6.36	7.15
Rated energy efficiency coefficient		EER2	3.89	3.79	3.47
Nominal capacity (T=7℃)	Heating	kW	22.40	28.00	33.50
Power consumption (T=7℃)		kW	5.27	6.86	8.44
Seasonal energy efficiency index		SCOP1	4.06	4.02	4.43
Rated energy efficiency coefficient		COP2	4.25	4.08	3.97
Electrical data					
Power		Ph-V-Hz	3Ph-380~415V-50Hz		
Rated current	Cooling	A	10.10	12.20	15.80
Rated current	Heating	A	9.10	11.30	13.80
Maximum current		A	16.00	20.00	21.20
Refrigerant circuit/features					
Refrigerant (GWP) ³		R410A (2088)			
Quantity refrigerant pre-load ⁴		kg	11.5	11.5	11.5
Tons of CO2 equivalent			24.012	24.012	24.012
Diameter refrigerant pipes	Liquid	inch (mm)	ø3/8" (9.52)	ø3/8" (9.52)	ø1/2" (12.7)
	Gas LP		ø3/4" (19.05)	ø7/8" (22.22)	ø1" (25.4)
	Gas HP		ø5/8" (15.88)	ø3/4" (19.05)	ø3/4" (19.05)
Product Specifications					
Dimensions	LxHxD	mm	1697x1350x720	1697x1350x720	1697x1350x720
Net weight		kg	305	305	305
Sound pressure level	Max	dB(A)	58	57	64
Sound power level	Max	dB(A)	77	76	82
Treated air volume	Standard	m³/h	13500	13500	17640
Fan static pressure	Max	Pa	50	50	50
Max. connectable I.U. ⁵	Min ~ Max	no	1 ~ 29	1 ~ 37	1 ~ 44
	Capacity	%	50 ~ 200	50 ~ 200	50 ~ 200

1. EU Regulation No. 206/2012 - N.2281/2016 - Value measured according to the harmonised standard EN 14825. 2. Value measured according to the harmonised standard EN 14511. 3. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 2088. If 1 kg of this refrigerant fluid were released into the atmosphere, therefore, the impact on global warming would be 2088 times higher than 1 kg of CO₂, over a period of 100 years. Under no circumstances should the user try to intervene on the refrigerant circuit or disassemble the product. Always contact qualified personnel if necessary. 4. For the calculation of the additional refrigerant charge refer to the labels placed inside and outside the unit.

KXZR2 heat recovery

KXZR2

CONNECT UP TO 71 INDOOR
UNITS/160% CAPACITY
(200% PER LE FDC 400~450)

FDC 400 KXZR2 40.0 kW
FDC 450 KXZR2 45.0 kW
FDC 475 KXZR2 47.5 kW
FDC 500 KXZR2 50.0 kW


FDC 560 KXZR2 56.0 kW
FDC 615 KXZR2 61.5 kW
FDC 670 KXZR2 67.0 kW

CHARACTERISTICS


- Maximum energy efficiency COP 4.10 e EER 3.46 [14 HP]
- Only DC Inverter compressors
- High split: up to 1000 m in total and with a maximum distance between the O.U. and the furthest I.U. of 160 m
- Up to 85 Pa prevalence on fans

OPERATING RANGE

14~24HP
(40.0~67.0 kW)



INSTALLATION DIAGRAM

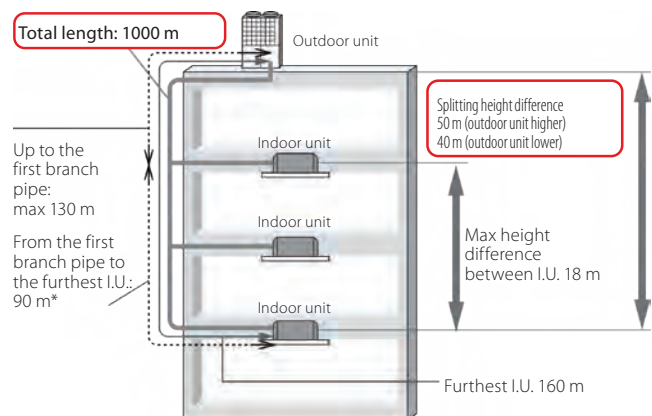

* With difference of length between the farthest indoor unit and the nearest one from the first branch pipe < 40 m.

Models			FDC400KXZR2	FDC450KXZR2	FDC475KXZR2	FDC500KXZR2	FDC560KXZR2	FDC615KXZR2	FDC670KXZR2
Rated power		HP	14	16	17	18	20	22	24
Nominal capacity (T=35°C)	Cooling	kW	40.00	45.00	47.50	50.00	56.00	61.50	67.00
Power consumption (T=35°C)		kW	11.56	14.47	14.84	15.20	19.31	21.35	25.57
Seasonal energy efficiency index		SEER ¹	6.78	6.29	6.6	7.01	6.26	6.05	5.88
Rated energy efficiency coefficient		EER ²	3.46	3.11	3.20	3.29	2.90	2.88	2.62
Nominal capacity (T=7°C)	Heating	kW	40.00	45.00	47.50	50.00	56.00	61.50	63.00
Power consumption (T=7°C)		kW	9.76	11.39	11.67	12.69	14.93	16.14	17.45
Seasonal energy efficiency index		SCOP ¹	4.39	4.33	4.27	4.39	4.29	4.34	4.50
Rated energy efficiency coefficient		COP ²	4.10	3.95	4.07	3.94	3.75	3.81	3.61
Electrical data									
Power		Ph-V-Hz	3Ph-380~415V-50Hz						
Rated current	Cooling	A	18.50	23.10	24.00	24.60	31.20	34.50	41.30
Rated current	Heating	A	15.90	18.60	18.90	20.50	24.10	26.10	28.20
Maximum current		A	30.00	32.00	40.40	41.00	41.60	42.00	42.40
Refrigerant circuit/features									
Refrigerant (GWP) ³			R410A (2088)						
Quantity refrigerant pre-load ⁴		kg	11.5	11.5	11.5	11.5	11.5	11.5	11.50
Tons of CO2 equivalent			24.012	24.012	24.012	24.012	24.012	24.012	24.012
Diameter refrigerant pipes	Liquid	inch (mm)	ø1/2" (12.7)	ø1/2" (12.7)	ø1/2" (12.7)	ø1/2" (12.7)	ø1/2" (12.7)	ø1/2" (12.7)	ø1/2" (12.7)
	Gas LP		ø1" (25.4)	ø1-1/8" (28.58)	ø1-1/8" (28.58)	ø1-1/8" (28.58)	ø1-1/8" (28.58)	ø1-1/8" (28.58)	ø1-1/8" (28.58)
	Gas HP		ø7/8" (22.22)	ø7/8" (22.22)	ø7/8" (22.22)	ø7/8" (22.22)	ø7/8" (22.22)	ø1" (25.4)	ø1" (25.4)
Product Specifications									
Dimensions		LxHxD	mm	2052x1350x720	2052x1350x720	2052x1350x720	2052x1350x720	2052x1350x720	2052x1350x720
Net weight			kg	372	372	420	420	420	420
Sound pressure level	Max		dB(A)	62	62	62	62	64	65
Sound power level	Max		dB(A)	82	82	82	82	82	83
Treated air volume	Standard		m³/h	18240	18240	18000	18000	18000	18000
Fan static pressure	Max		Pa	50	50	50	50	50	50
Max. connectable I.U. ⁵	Min ~ Max	no	1 ~ 53	1 ~ 60	1 ~ 50	1 ~ 53	1 ~ 59	2 ~ 65	2 ~ 71
	Capacity	%	50 ~ 200	50 ~ 200	50 ~ 160	50 ~ 160	50 ~ 160	50 ~ 160	50 ~ 160

1. EU Regulation No. 206/2012 - N.2281/2016 - Value measured according to the harmonised standard EN 14825. 2. Value measured according to the harmonised standard EN 14511. 3. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 2088. If 1 kg of this refrigerant fluid were released into the atmosphere, therefore, the impact on global warming would be 2088 times higher than 1 kg of CO₂ over a period of 100 years. Under no circumstances should the user try to intervene on the refrigerant circuit or disassemble the product. Always contact qualified personnel if necessary. 4. For the calculation of the additional refrigerant charge refer to the labels placed inside and outside the unit.

KXZR2 - MODULAR OUTDOOR UNITS


CONNECT UP TO 78 INDOOR UNITS (FDC 735)
AND UP TO 80 INDOOR UNITS (FDC 800~1120) TO
160% CAPACITY (FDC 735~950) AND UP TO 130%
CAPACITY (FDC 1000~1120)

FDC 735 KXZRE2 (FDC 335+FDC 400) 73.5 kW
FDC 800 KXZRE2 (FDC 400+FDC 400) 80.0 kW
FDC 850 KXZRE2 (FDC 400+FDC 450) 85.0 kW
FDC 900 KXZRE2 (FDC 450+FDC 450) 90.0 kW
FDC 950 KXZRE2 (FDC 475+FDC 750) 95.0 kW
FDC 1000 KXZRE2 (FDC 500+FDC 500) 100.0 kW
FDC 1060 KXZRE2 (FDC 500+FDC 560) 106.0 kW
FDC 1120 KXZRE2 (FDC 560+FDC 560) 112.0 kW

CHARACTERISTICS

- Maximum energy efficiency COP 4.10 (28HP); EER 3,47 (26HP)
- Only DC Inverter compressors
- High split: up to 1000 m in total and with a maximum distance between the O.U. and the furthest I.U. of 160 m
- Up to 85 Pa prevalence on fans

OPERATING RANGE



26HP (73.5 kW)



28~40HP (80.0~112.0 kW)

COMBINATIONS

Models			FDC735KXZRE2	FDC800KXZRE2	FDC850KXZRE2	FDC900KXZRE2	FDC950KXZRE2	FDC1000KXZRE2	FDC1060KXZRE2	FDC1120KXZRE2
Combinations			FDC335KXZRE2	FDC400KXZRE2	FDC400KXZRE2	FDC450KXZRE2	FDC475KXZRE2	FDC500KXZRE2	FDC500KXZRE2	FDC560KXZRE2
			-	-	-	-	-	-	-	-
Rated power			HP	26	28	30	32	34	36	38
Nominal capacity (T=35°C)			kW	73.50	80.00	85.00	90.00	95.00	100.00	106.00
Power consumption (T=35°C)			kW	21.21	23.12	26.03	28.94	29.68	30.40	34.51
Rated energy efficiency coefficient			EER ¹	3.47	3.46	3.27	3.11	3.20	3.29	3.07
Nominal capacity (T=7°C)			kW	73.50	80.00	85.00	90.00	95.00	100.00	106.00
Power consumption (T=7°C)			kW	18.20	19.52	21.15	22.78	23.34	25.38	27.62
Rated energy efficiency coefficient			COP ¹	4.04	4.10	4.02	3.95	4.07	3.94	3.84
Electrical data			Ph-V-Hz	3Ph-380~415V-50Hz						
Rated current			A	34.30	37.00	41.60	46.30	48.00	49.10	55.80
Rated current			A	29.70	31.90	34.60	37.20	37.70	41.00	44.60
Maximum current			A	51.20	60.00	62.00	64.00	80.80	82.00	83.20
Refrigerant circuit/features				R410A (2088)						
Refrigerant (GWP) ²				23	23	23	23	23	23	23
Quantity refrigerant pre-load ³			kg	48.024	48.024	48.024	48.024	48.024	48.024	48.024
Tons of CO2 equivalent				48.024	48.024	48.024	48.024	48.024	48.024	48.024
Diameter refrigerant pipes ⁴			Liquid	ø5/8" (15.88)	ø5/8" (15.88)	ø5/8" (15.88)	ø5/8" (15.88)	ø5/8" (15.88)	ø5/8" (15.88)	ø3/4" (19.05)
			Gas LP	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/2" (38.1)	ø1-1/2" (38.1)
			Gas HP	ø1" (25.4)	ø1-1/8" (28.58)	ø1-1/8" (28.58)	ø1-1/8" (28.58)	ø1-1/8" (28.58)	ø1-1/8" (28.58)	ø1-1/4" (31.75)
			Oil balancing	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)
Product Specifications										
Dimensions			LxHxD	mm	2052x2700x720	2052x2700x720	2052x2700x720	2052x2700x720	2052x2700x720	2052x2700x720
Net weight			kg	677	744	744	744	840	840	840
Max. connectable I.U. ⁵			Min ~ Max	no	2 ~ 78	2 ~ 80	2 ~ 80	2 ~ 80	2 ~ 80	2 ~ 80
			Capacity	%	50 ~ 160	50 ~ 160	50 ~ 160	50 ~ 160	50 ~ 130	50 ~ 130

1. Value measured according to the harmonised standard EN 14511.2. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 2088. If 1 kg of this refrigerant fluid were released into the atmosphere, therefore, the impact on global warming would be 2088 times higher than 1 kg of CO₂ over a period of 100 years. Under no circumstances should the user try to intervene on the refrigerant circuit or disassemble the product. Always contact qualified personnel if necessary. 3. For the calculation of the additional refrigerant charge, refer to the labels positioned inside and outside the unit. 4. The diameters indicated refer to the section up to the first junction, with an equivalent length of less than 90 m. 5. When connecting indoor units of type FDK, FDFL, FDFU or FDFW the upper limit is always 130%.

KXZR2 - MODULAR OUTDOOR UNITS


CONNECT UP TO 80 INDOOR UNITS/130% CAPACITY

FDC 1200 KXZRE2 (FDC 400+FDC 400+FDC 400)	120.0 kW
FDC 1250 KXZRE2 (FDC 400+FDC 400+FDC 450)	125.0 kW
FDC 1300 KXZRE2 (FDC 400+FDC 450+FDC 450)	130.0 kW
FDC 1350 KXZRE2 (FDC 450+FDC 450+FDC 450)	135.0 kW
FDC 1425 KXZRE2 (FDC 475+FDC 475+FDC 475)	142.5 kW
FDC 1450 KXZRE2 (FDC 475+FDC 475+FDC 500)	145.0 kW
FDC 1500 KXZRE2 (FDC 500+FDC 500+FDC 500)	150.0 kW
FDC 1560 KXZRE2 (FDC 500+FDC 500+FDC 560)	156.0 kW
FDC 1620 KXZRE2 (FDC 500+FDC 560+FDC 560)	162.0 kW
FDC 1680 KXZRE2 (FDC 560+FDC 560+FDC 560)	168.0 kW

CHARACTERISTICS

- Maximum energy efficiency COP 4.10 e EER 3.46 (42HP)
- Only DC Inverter compressors
- High split: up to 1000 m in total and with a maximum distance between the O.U. and the furthest I.U. of 160 m
- Up to 85 Pa prevalence on fans

OPERATING RANGE



42~60HP
(120.0~168.0 kW)

COMBINATIONS

Models			FDC1200KXZRE2	FDC1250KXZRE2	FDC1300KXZRE2	FDC1350KXZRE2	FDC1425KXZRE2	FDC1450KXZRE2	FDC1500KXZRE2	FDC1560KXZRE2	FDC1620KXZRE2	FDC1680KXZRE2	
Combinations			FDC400KXZRE2	FDC400KXZRE2	FDC400KXZRE2	FDC450KXZRE2	FDC475KXZRE2	FDC475KXZRE2	FDC500KXZRE2	FDC500KXZRE2	FDC500KXZRE2	FDC560KXZRE2	
Rated power			HP	42	44	46	48	50	52	54	56	58	60
Nominal capacity (T=35°C)		Cooling	kW	120.00	125.00	130.00	135.00	142.50	145.00	150.00	156.00	162.00	168.00
Power consumption (T=35°C)			kW	34.68	37.59	40.50	43.41	44.52	44.88	45.60	49.71	53.82	57.93
Rated energy efficiency coefficient			EER ¹	3.46	3.33	3.21	3.11	3.20	3.23	3.29	3.14	3.01	2.90
Nominal capacity (T=7°C)		Heating	kW	120.00	125.00	130.00	135.00	142.50	145.00	150.00	156.00	162.00	168.00
Power consumption (T=7°C)			kW	29.28	30.91	32.54	34.17	35.01	36.03	38.07	40.31	42.55	44.79
Rated energy efficiency coefficient			COP ¹	4.10	4.04	4.00	3.95	4.07	4.02	3.94	3.87	3.81	3.75
Electrical data													
Power			Ph-V-Hz	3Ph-380~415V-50Hz									
Rated current		Cooling	A	55.50	60.10	64.80	69.40	72.00	72.50	73.70	80.30	87.00	93.60
Rated current		Heating	A	47.80	50.50	53.20	55.80	56.60	58.20	61.50	65.20	68.80	72.40
Maximum current			A	90.00	92.00	94.00	96.00	121.20	121.80	123.00	123.60	124.20	124.80
Refrigerant circuit/features													
Refrigerant (GWP) ²				R410A (2088)									
Quantity refrigerant pre-load ³			kg	34.5	34.5	34.5	34.5	34.5	34.5	34.5	34.5	34.5	34.5
Tons of CO2 equivalent				72.036	72.036	72.036	72.036	72.036	72.036	72.036	72.036	72.036	72.036
Diameter refrigerant pipes ⁴		Liquid	inch (mm)	ø3/4" (19.05)	ø3/4" (19.05)	ø3/4" (19.05)	ø3/4" (19.05)	ø3/4" (19.05)	ø3/4" (19.05)	ø3/4" (19.05)	ø3/4" (19.05)	ø3/4" (19.05)	ø3/4" (19.05)
		Gas LP		ø1-1/2" (38.1)	ø1-1/2" (38.1)	ø1-1/2" (38.1)	ø1-1/2" (38.1)	ø1-1/2" (38.1)	ø1-1/2" (38.1)	ø1-1/2" (38.1)	ø1-1/2" (38.1)	ø1-1/2" (38.1)	ø1-1/2" (38.1)
		Gas HP		ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)	ø1-1/4" (31.75)
		Oil balancing		ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)	ø3/8" (9.52)
Product Specifications													
Dimensions		LxHxD	mm	2052x4050x720	2052x4050x720	2052x4050x720	2052x4050x720	2052x4050x720	2052x4050x720	2052x4050x720	2052x4050x720	2052x4050x720	2052x4050x720
Net weight			kg	1116	1116	1116	1116	1260	1260	1260	1260	1260	1260
Max. connectable I.U. ⁵		Min ~ Max	no	3 ~ 80	3 ~ 80	3 ~ 80	3 ~ 80	3 ~ 80	3 ~ 80	3 ~ 80	3 ~ 80	3 ~ 80	3 ~ 80
		Capacity	%	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130

1. Value measured according to the harmonised standard EN 14511.2. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 2088. If 1 kg of this refrigerant fluid were released into the atmosphere, therefore, the impact on global warming would be 2088 times higher than 1 kg of CO₂ over a period of 100 years. Under no circumstances should the user try to intervene on the refrigerant circuit or disassemble the product. Always contact qualified personnel if necessary. 3. For the calculation of the additional refrigerant charge, refer to the labels positioned inside and outside the unit. 4. The diameters indicated refer to the section up to the first junction, with an equivalent length of less than 90 m. 5. When connecting indoor units of type FDK, FDFL, FDFU or FDFW the upper limit is always 130%.