


MULTISPLIT SUPER

TWIN / TRIPLE / DOUBLE TWIN COMBINATIONS R32

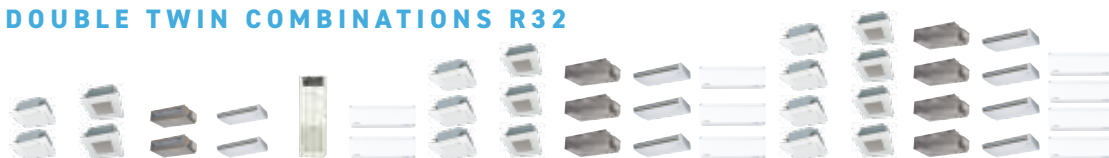

Model	Indoor unit	Combinations	FDT~VH	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-W	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-W
		TWIN	50+50	50+50	50+50	50+50		50+50										
		Outdoor unit	FDC100 VNS/A-W					FDC100 VNS/A-W										
Rated capacity (T=35°C)	Cooling	KW	10.00	10.00	10.00	10.00		10.00										
Rated power input (T=35°C)		KW	2.82	3.15	3.25	3.12		2.89										
Rated energy efficiency coefficient		EER ¹	3.55	3.17	3.08	3.21		3.46										
Rated capacity (T=7°C)	Heating	KW	11.20	11.20	11.20	11.20		11.20										
Rated power input (T=7°C)		KW	2.73	3.05	3.04	2.99		2.61										
Rated energy efficiency coefficient		COP ¹	4.11	3.67	3.68	3.75		4.29										
Installation accessories			DIS-WA1G					DIS-WA1G										
Controls			RC-EX3A/RC-ES					RC-EX3A/RC-ES										
Communication interface			-					2xSC-BKN2-E										

Model	Indoor unit	Combinations	FDT~VH	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF
		TWIN	60+60	60+60	60+60	60+60		60+60										
		Outdoor unit	FDC125 VNS/A-W					FDC125 VNS/A-W										
Rated capacity (T=35°C)	Cooling	KW	12.50	12.50	12.50	12.50		12.50										
Rated power input (T=35°C)		KW	3.79	4.90	4.53	4.16		4.54										
Rated energy efficiency coefficient		EER ¹	3.30	2.55	2.76	3.00		2.76										
Rated capacity (T=7°C)	Heating	KW	14.00	14.00	14.00	14.00		14.00										
Rated power input (T=7°C)		KW	3.31	4.30	3.52	3.54		3.58										
Rated energy efficiency coefficient		COP ¹	4.23	3.26	3.98	3.95		3.91										
Installation accessories			DIS-WA1G					DIS-WA1G										
Controls			RC-EX3A/RC-ES					RC-EX3A/RC-ES										
Communication interface			-					2xSC-BKN2-E										

Model	Indoor unit	Combinations	FDT~VH	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF
		TWIN	71+71															
		TRIPLE																
		Outdoor unit	FDC140 VNS/A-W					FDC140 VNS/A-W										
Rated capacity (T=35°C)	Cooling	KW	13.60	13.60	13.60	13.60		13.60										
Rated power input (T=35°C)		KW	4.22	5.02	4.74	4.46		4.22										
Rated energy efficiency coefficient		EER ¹	3.22	2.71	2.87	3.05		3.22										
Rated capacity (T=7°C)	Heating	KW	15.50	15.50	15.50	15.50		15.50										
Rated power input (T=7°C)		KW	3.57	4.20	4.21	4.49		3.57										
Rated energy efficiency coefficient		COP ¹	4.34	3.69	3.68	3.46		3.88										
Installation accessories			DIS-WA1G					DIS-WA1G										
Controls			RC-EX3A/RC-ES					RC-EX3A/RC-ES										
Communication interface			-					2xSC-BKN2-E										

Model	Indoor unit	Combinations	FDT~VH	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF
		TWIN	100+100															
		TRIPLE																
		D. TWIN																
		Outdoor unit	FDC200 VSA-W					FDC200 VSA-W										
Rated capacity (T=35°C)	Cooling	KW	20.00	20.00	20.00	20.00		20.00										
Rated power input (T=35°C)		KW	5.48	6.58	6.29	6.71		5.56										
Rated energy efficiency coefficient		EER ¹	3.65	3.04	3.18	2.98		3.60										
Rated capacity (T=7°C)	Heating	KW	22.40	22.40	22.40	22.40		22.40										
Rated power input (T=7°C)		KW	5.27	5.59	5.66	6.06		5.27										
Rated energy efficiency coefficient		COP ¹	4.25	4.01	3.96	3.69		4.25										
Installation accessories			DIS-WB1G					DIS-WB1G										
Controls			RC-EX3A/RC-ES					RC-EX3A/RC-ES										
Communication interface			-					2xSC-BKN2-E										

Model	Indoor unit	Combinations	FDT~VH	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF
		TWIN	125+125															
		TRIPLE																
		D. TWIN																
		Outdoor unit	FDC250 VSA-W					FDC250 VSA-W										
Rated capacity (T=35°C)	Cooling	KW	25.00	25.00	25.00	25.00		25.00										
Rated power input (T=35°C)		KW	8.20	8.74	8.20	9.54		8.20										
Rated energy efficiency coefficient		EER ¹	3.05	2.86	3.05	2.62		3.05										
Rated capacity (T=7°C)	Heating	KW	28.00	28.00	28.00	28.00		28.00										
Rated power input (T=7°C)		KW	7.37	7.90	7.93	8.37		7.37										
Rated energy efficiency coefficient		COP ¹	3.80	3.54	3.53	3.35		3.80										
Installation accessories			DIS-WB1G					DIS-WB1G										
Controls			RC-EX3A/RC-ES					RC-EX3A/RC-ES										
Communication interface			-					2xSC-BKN2-E										

Model	Indoor unit	Combinations	FDT~VH	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF	FDT~VH	FDT~VH	FDT~VH	FDT~VH	SRK~ZSX-WF
		TWIN	140+140															
		TRIPLE																
		D. TWIN																
		Outdoor unit	FDC280 VSA-W					FDC280 VSA-W										
Rated capacity (T=35°C)	Cooling	KW	27.00	27.00	27.00	27.00		27.00										
Rated power input (T=35°C)		KW	9.11	10.05	9.31	10.93		9.11										
Rated energy efficiency coefficient		EER ¹	2.96	2.69	2.90	2.47		2.96										
Rated capacity (T=7°C)	Heating	KW	30.00	30.00	30.00	30.00		30.00										
Rated power input (T=7°C)		KW	8.95	8.47	8.98	9.47		8.95										
Rated energy efficiency coefficient		COP ¹	3.35	3.54	3.34	3.17		3.35										
Installation accessories			DIS-WB1G					DIS-WB1G										
Controls			RC-EX3A/RC-ES					RC-EX3A/RC-ES										
Communication interface			-					2xSC-BKN2-E										

¹ Value measured according to harmonised standard EN14511.