


MONOSPLIT SUPER

DUCTED MEDIUM STATIC PRESSURE ADJUSTABLE R32

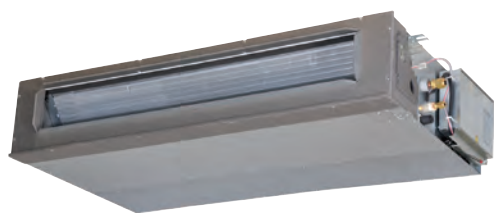

- **max 100**
Fan static pressure
- Unit with bottom or rear air intake
- **280 mm**
Height
- **50 m**
Splitting distance
- ESP function: automatic maintenance of the air flow rate as flow resistance varies
- Filter not included
- Compatible with **AIRZONE** systems

FDUM 100-125-140 VH

Indoor unit model		FDUM 100 VH	FDUM 100 VH	FDUM 125 VH	FDUM 125 VH	FDUM 140 VH	FDUM 140 VH	
Outdoor unit model		FDC 100 VNA-W	FDC 100 VSA-W	FDC 125 VNA-W	FDC 125 VSA-W	FDC 140 VNA-W	FDC 140 VSA-W	
Type		DC-Inverter heat pump						
Nominal data								
Rated capacity (T=+35°C)	Cooling	kW	10.00 (4.00~11.20)		12.50 (5.00~14.00)		13.60 (5.00~14.50)	
Rated power input (T=+35°C)		kW	2.99		4.36		5.13	
Rated energy efficiency coefficient		EER ¹	3.35		2.87		2.65	
Rated capacity (T=+7°C)	Heating	kW	11.20 (4.00~12.50)		14.00 (4.00~16.00)		15.50 (4.00~16.50)	
Rated power input (T=+7°C)		kW	2.66		3.69		4.21	
Rated energy performance coefficient		COP ¹	4.21		3.79		3.68	
Seasonal data								
Design load (Pdesignc)	Cooling	kW	10.00		12.50		13.60	
Seasonal energy efficiency index		SEER ²	6.11		5.57		5.30	
Seasonal energy efficiency class		626/2011 ³	A++		-		-	
Annual energy consumption		kWh/y	574		-		-	
Design load (Pdesignh) @ -10°C	Heating (average climate conditions)	kW	8.50		9.80		10.50	
Seasonal performance coefficient		SCOP ²	4.19		4.13		4.01	
Seasonal energy efficiency (ηs)		%	164.60		162.20		157.40	
Seasonal energy efficiency class		626/2011 ³	A+		-		-	
Annual energy consumption	kWh/y	2843		-		-		
Electrical data								
Power supply	Outdoor unit	Ph-V-Hz	1-220~240V-50Hz	3-380~415V-50Hz	1-220~240V-50Hz	3-380~415V-50Hz	1-220~240V-50Hz	3-380~415V-50Hz
Power cable		Type	3 x 6 mm ²	5 x 4 mm ²	3 x 6 mm ²	5 x 4 mm ²	3 x 6 mm ²	5 x 4 mm ²
Connection wires between I.U. and O.U.		nb.	4	4	4	4	4	4
Nominal absorbed current	Cooling	A	14.30	4.60	20.40	6.80	23.70	8.10
	Heating	A	12.70	4.10	17.80	5.90	20.30	6.80
Maximum current	A	26.00	17.00	26.00	17.00	27.00	18.00	
Max power input	kW	6.40	10.20	6.40	10.20	6.40	10.20	
Refrigerant circuit data								
Refrigerant ⁴	Type (GWP)	R32 (675)						
Quantity of refrigerant pre-charge	Kg	3.3		3.3		3.3		
Tons of CO2 equivalent	t	2.228		2.228		2.228		
Diameter of refrigerant pipings liquid/gas	mm (inches)	ø9.52 (3/8") - ø15.88(5/8")		ø9.52 (3/8") - ø15.88(5/8")		ø9.52 (3/8") - ø15.88(5/8")		
Splitting distance	m	50		50		50		
Splitting level difference I.U./O.U.	O.U.: above/O.U. below	m		50/15		50/15		
Splitting distance without additional charge	m	30		30		30		
Additional charge	g/m	54		54		54		
Indoor unit specifications								
Dimensions	LxDxH	mm	1370x740x280		1370x740x280		1370x740x280	
Net weight	Kg	54		54		54		
Sound power level	Max	dB(A)	65		67		70	
Sound pressure level	P-Hi/Hi/Me/Lo	dB(A)	44/38/36/30		45/40/34/29		47/40/35/30	
Volume of air treated	P-Hi/Hi/Me/Lo	m ³ /h	2160/1680/1500/1140		2340/1920/1560/1200		2880/2100/1680/1320	
Fan static pressure	Std/Max	Pa	60/100		60/100		60/100	
Outdoor unit specifications								
Dimensions	LxDxH	mm	970x370x845		970x370x845		970x370x845	
Net weight	Kg	77	78	77	78	77	78	
Sound power level	Max	dB(A)	70		71		73	
Sound pressure level	Max	dB(A)	55		56		58	
Volume of air treated	Max	m ³ /h	4500		4500		4500	
Operating range (outdoor temperature)	Cooling	°C	-15~+50		-15~+50		-15~+50	
	Heating	°C	-20~+20		-20~+20		-20~+20	
Accessories								
Wired control	RC-E5 (LCD) / RC-EX3A (touch) / RC-EX23A (touch + zone control) / RCH-E3 (simplified)							
IR remote control (KIT)	RCN-KIT4-E2							
Optional parts								
Wi-Fi module	INWFIMH001R100							
Human sensor (KIT)	LB-KIT2							
SUPERLINK II interface	SC-ADNA-E							
Recovery filter (KIT)	UM-FL3EF							

1. Value measured according to the harmonised standard EN 14511. 2. EU Regulation No. 206/2012 - N. 2281/2016 - Value measured according to the harmonised standard EN 14825. 3. Delegated Regulation (EU) No 626/2011 regarding the new energy labelling of air conditioners. 4. Refrigerant leakage contributes to climate change. When released into the atmosphere, refrigerants with a lower global warming potential (GWP) contribute less to global warming than those with a higher GWP. This appliance contains a refrigerant with a GWP of 675. If 1 kg of this refrigerant fluid were released into the atmosphere, therefore, the impact on global warming would be 675 times higher than 1 kg of CO₂ over a period of 100 years. Under no circumstances should the user try to intervene on the refrigerant circuit or disassemble the product. Always contact qualified personnel if necessary.